

sinopé

Control 4

LOW VOLTAGE
SMART THERMOSTAT [24 Vac]
TH1400ZB-C4

UNPARALLELED COMFORT.
TOTAL CONTROL.

Get the best temperature accuracy and unparalleled comfort by controlling central heating and an auxiliary heating unit with a single thermostat.

Select the floor or ambient temperature control for absolute comfort. All the information you need is available from the thermostat display.

Ideal for: house, cottage, multi-housing property managers, and commercial buildings



TH1400ZB-C4



Electric [with relay] and hydronic heating | Furnaces [without fan control] | And much more!

LOW VOLTAGE SMART THERMOSTAT [24 Vac] TH1400ZB-C4

ADDED VALUE

- Second output allowing the control of an auxiliary heating device
- Floor or ambient temperature control
- Protection of the pump of a hydronic system during long periods of inactivity
- Outdoor temperature display
- Lockable buttons
- Temperature display in °C or °F
- Backlit display
- 3-year warranty

TRANSMISSION

Zigbee profile 3.0
 Frequency: 2.4 GHz
 Transmission power: +20 dBm
 Receiver sensitivity: -108 dBm

OPERATION

- The smart low voltage thermostat can be controlled manually or remotely.

Remote access requires a permanent Internet connection and a Control4 controller.




SPECIFICATIONS

Operating voltage: 24 Vac
 Maximum load: 1 Amp
 Setpoint range: 5 °C to 30 °C [41 °F to 86 °F]
 Display range: 0 °C to 70 °C [32 °F to 99 °F]
 Resolution: ± 0.5 °C [1 °F]
 Storage: -20 °C to 50 °C [-4 °F to 122 °F]
 Auxiliary output: 1 Amp

Designed to control any 24-Vac heating load.

Cannot be used with air conditioning systems or heat pumps.

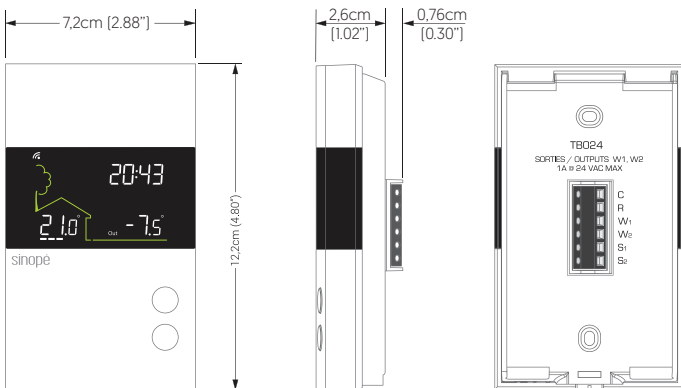

sinopé

T: 450.741.7700 TF: 1.855.741.7701

sinopetech.com

ventes.sales@sinopetech.com

Saint-Jean-sur-Richelieu, Qc, Canada