

sinopé



Smart Thermostat for Electric Heating TH1123ZB



Electric baseboard



Fan-forced convector (long cycle)



Convector (short cycle)



Radiant ceiling heating



■ FEATURES*

- Backlit display
- Detects the connected load
- Lockable buttons
- Personalization of the minimum and maximum temperatures available for thermostat control
- Indoor and outdoor temperatures featured on the thermostat display
- Temperature displayed in °C or °F

* These features are available in Neviweb and Neviweb Premium and require the GT130 hub. Features may vary from a platform to another.

■ COMMUNICATION

Protocol: Zigbee 3.0
 Frequency: 2.4 GHz
 Transmission power: +20 dBm
 Receiver sensitivity: -108 dBm
 Encryption key: AES-128



Also available:
 Smart Thermostat for
 Electric Heating (4000 W)

TH1124ZB



- **Automations:** create automations that run based on time, sunrise/sunset, device action, or your presence
- **Scenes:** activate personalized ambiances according to the time of the day, events or activity
- **Energy reports:** see your consumption and savings in real-time
- **Geofencing:** trigger actions based on your presence
- **Voice assistants:** works with Amazon Alexa and Google Assistant

* Discover more features: sinopetech.com

■ TECHNICAL SPECIFICATIONS

Operating voltage: 120/208/240 Vac, 60 Hz
 Bilateral triode switch (triac)

Maximum load (resistive load only):

TH1123ZB	TH1124ZB
Min. 1.25 A / 300 W @ 240 Vac	Min. 1.25 A / 300 W @ 240 Vac
Max. 12.5 A / 3000 W @ 240 Vac	Max. 16.7 A / 4000 W @ 240 Vac

Setpoint range: 5 °C to 30 °C (41 °F to 86 °F)

Display range: 0 °C to 50 °C (32 °F to 99 °F)

Storage: -20 °C to 50 °C (-4 °F to 122 °F)


Operation: 0 °C to 50 °C (32 °F to 122 °F)

Resolution: ± 0.5 °C (± 1 °F)

3-year warranty

■ CERTIFICATIONS

Conforms to CSA-C828-13

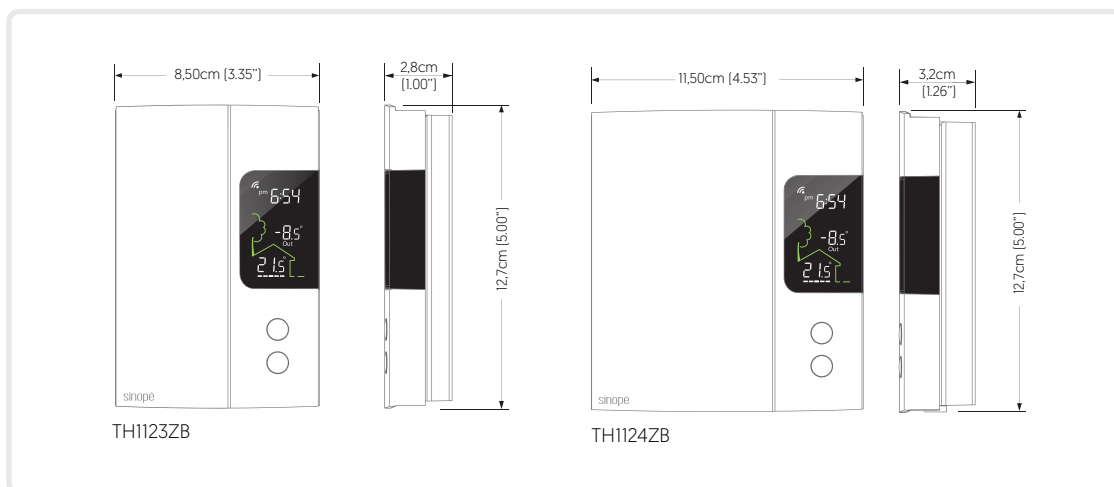

T: 450.741.7700
 TF: 1.855.741.7701

sinopetech.com - sales@sinopetech.com
 Saint-Jean-sur-Richelieu, Qc, Canada