

sinopé



## Smart Double-Pole Thermostat TH1500ZB



Electric baseboard



Fan-forced convector



Convector



Radiant ceiling heating



## ■ FEATURES\*

- Backlit display
- Detects the connected load
- Lockable buttons
- Personalization of the minimum and maximum temperatures available for thermostat control
- Indoor and outdoor temperatures featured on the thermostat display
- Temperature displayed in °C or °F

\* These features are available in Neviweb and Neviweb Premium and require the GT130 hub. Features may vary from a platform to another.

## ■ COMMUNICATION

Protocol: Zigbee 3.0  
Frequency: 2.4 GHz  
Transmission power: +20 dBm  
Receiver sensitivity: -108 dBm  
Encryption key: AES-128

## ■ CERTIFICATIONS

Conforms to CSA-C828-13



- **Automations:** create automations that run based on time, sunrise/sunset, device action, or your presence
- **Scenes:** activate personalized ambiances according to the time of the day, events or activity
- **Energy reports:** see your consumption and savings in real-time
- **Geofencing:** trigger actions based on your presence
- **Voice assistants:** works with Amazon Alexa and Google Assistant

\* Discover more features: [sinopetech.com](http://sinopetech.com)

## ■ TECHNICAL SPECIFICATIONS

Operating voltage: 120/208/240/277 Vac, 50/60 Hz

Relay switching

Maximum load:

1800 W @ 120 Vac / 15 A

3120 W @ 208 Vac / 15 A

3600 W @ 240 Vac / 15 A

4155 W @ 277 Vac / 15 A


Setpoint range: 5 °C to 36 °C [41 °F to 97 °F]

Display range: 0 °C to 50 °C [32 °F to 99 °F]

Storage: -20 °C to 50 °C [-4 °F to 122 °F]

Resolution: ± 0.5 °C [± 1 °F]

3-year warranty

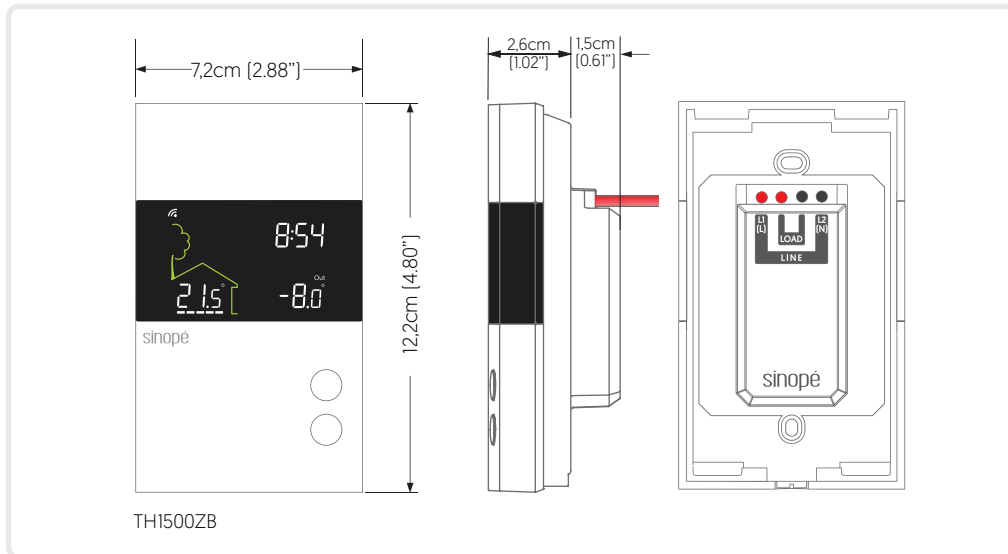

T: 450.741.7700  
TF: 1.855.741.7701

[sinopetech.com](http://sinopetech.com) - [sales@sinopetech.com](mailto:sales@sinopetech.com)  
Saint-Jean-sur-Richelieu, Qc, Canada