


sinopé



Smart Dimmer DM2500ZB

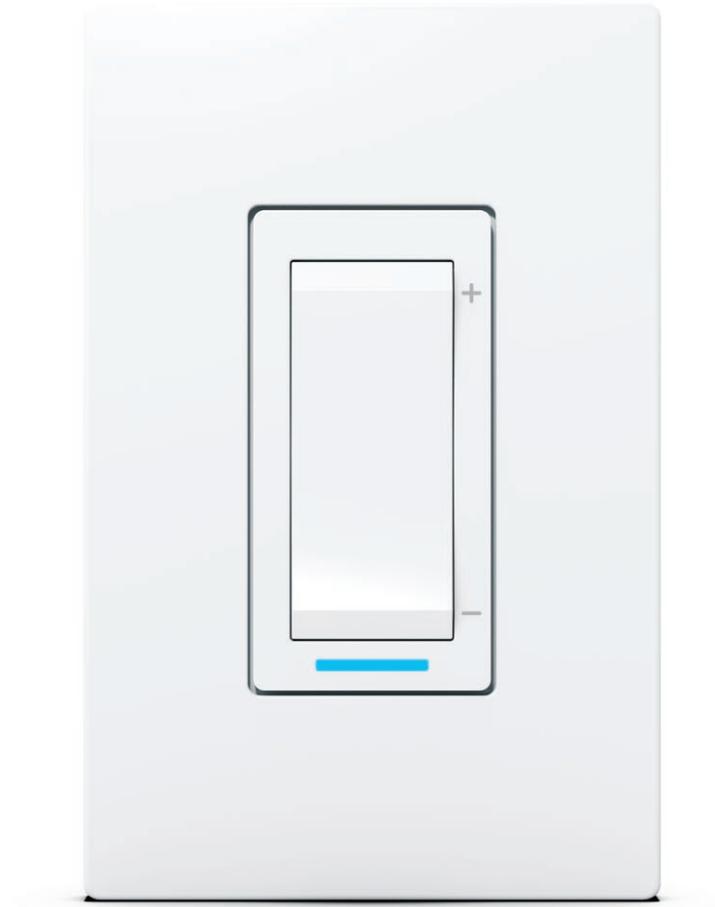

Dimmable light-emitting diode (LED)



Incandescent lighting



Halogen lighting



■ FEATURES*

- Equipped with a timer to automatically turn off the lighting after a given time*
- Lockable manual control*
- Personalization of the minimum intensity level to get the right lighting quickly*
- Personalization of the color and intensity of the LED on the product. Available colors: blue, amber, fuchsia, lime, pearl*
- Integrates directly with the Echo Show and Amazon Echo Plus

*These features are available in Neviweb and require the GTI30 hub. Features may vary from a platform to another.

■ COMMUNICATION

Protocol: Zigbee 3.0
Frequency: 2.4 GHz
Transmission power: +20 dBm
Receiver sensitivity: -108 dBm
Encryption key: AES-128

■ CERTIFICATION



■ STANDARDS

Conforms to ANSI/UL Std. 1472
Certified under CAN/CSA Std. C22.2 No184.1




- **Automations:** create automations that run based on time, sunrise/sunset, device action, or your presence
- **Scenes:** activate personalized ambiances according to the time of the day, events or activity
- **Energy reports:** see your consumption and savings in real-time
- **Geofencing:** trigger actions based on your presence
- **Voice assistants:** works with Amazon Alexa and Google Assistant

*Discover more features: sinopetech.com

■ TECHNICAL SPECIFICATIONS

Operating voltage: 120 Vac, 60 Hz
Maximum load:
150 W: Dimmable LED
600 W: Incandescent, halogen (single installation)
500 W: Incandescent, halogen (multi-gang – 2 units)
400 W: Incandescent, halogen (multi-gang – 3 units)
Operating temperature: 0 °C to 40 °C [32 °F to 104 °F]
Storage temperature: -20 °C to 50 °C [-4 °F to 122 °F]

Neutral wire required
TRIAC control technology
Simple installation (3 or 4 wires)
Single pole application, 3-way compatible with switches only
Wall plate not included
3-year warranty

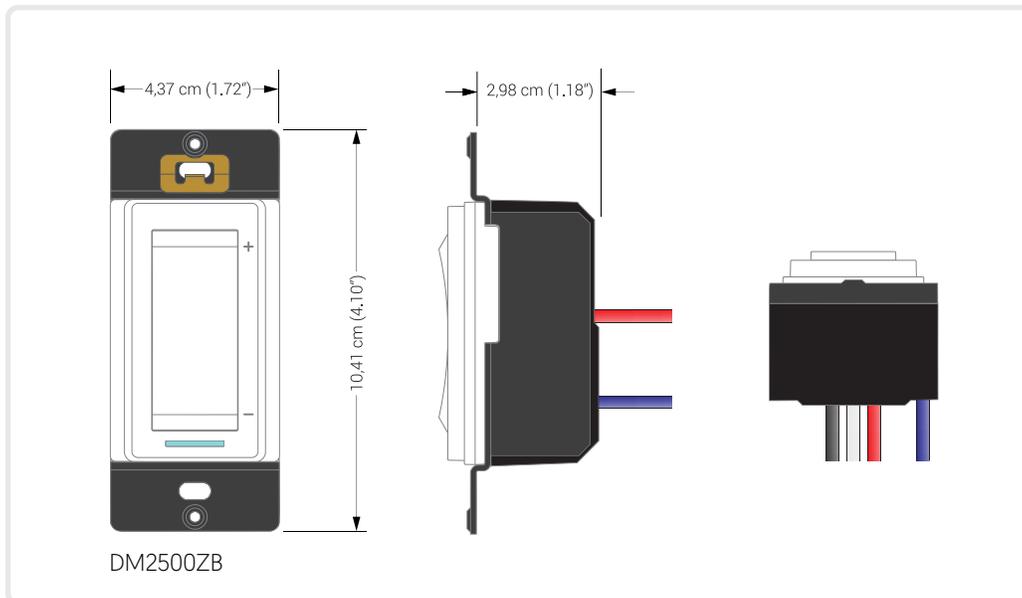

T: 450.741.7700
TF: 1.855.741.7701

sinopetech.com - sales@sinopetech.com
Saint-Jean-sur-Richelieu, Qc, Canada