


sinopé



Smart Dimmer
DM2500ZB-C4

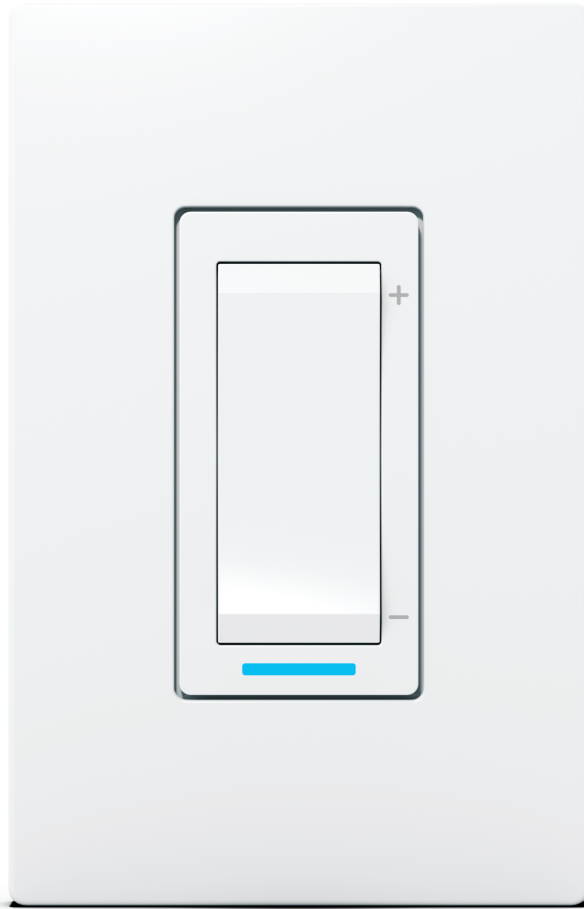

Dimmable light-emitting diode (LED)



Incandescent lighting



Halogen lighting

CONNECTS WITH
Control4
CERTIFIED

■ FEATURES*

- Remotely operate individual lights or groups of lights**
- Personalization of the minimum intensity level to get the right lighting quickly*
- Personalization of the color and intensity of the LED on the product. Available colors: blue, amber, fuchsia, lime, pearl*

*Some features must be programmed by a Control4 integrator.
**Requires a permanent Internet connection and a Control4 controller.

■ COMMUNICATION

Protocol: Zigbee 3.0
Frequency: 2.4 GHz
Transmission power: +20 dBm
Receiver sensitivity: -108 dBm
Encryption key: AES-128

■ CERTIFICATION



■ STANDARDS

Conforms to ANSI/UL Std. 1472
Certified under CAN/CSA Std. C22.2 No184.1

- Integrates with personalized scenes
- Schedule programming
- Can be voice controlled with Amazon Alexa and Google Assistant

■ TECHNICAL SPECIFICATIONS

Operating voltage: 120 Vac, 60 Hz

Maximum load:

150 W: Dimmable LED

600 W: Incandescent, halogen (single installation)

500 W: Incandescent, halogen (multi-gang – 2 units)

400 W: Incandescent, halogen (multi-gang – 3 units)

Operating temperature: 0 °C to 40 °C [32 °F to 104 °F]

Storage temperature: -20 °C to 50 °C [-4 °F to 122 °F]

Neutral wire required

Simple installation (3 or 4 wires)

Single pole application, 3-way compatible with switches only

Wall plate not included

3-year warranty

