

SmartThings driver installation guide for Zigbee smart dimmer DM2500ZB

Step by step driver installation:

- 1 Log on the SmartThings API
- 2 Click on "My Device Handlers"
- 3 Click on "Create New Device Handler"



- 4 Click on "From Code" and copy the code
- 5 Click on "Create"

Create New Device Handler

Every device requires a [Device Handler](#) to be recognized by the SmartThings platform. Select one of the options below to create your SmartThings hub. After successful testing, you may [submit](#) your Device Handler and device for publication and certification, [certification](#) and [pairing](#).

[From Form](#) **[From Code](#)** [From Template](#) [From ZigBee Device Fingerprint](#)

```
/**
 * Copyright Sinopé Technologies
 * SVN-365
 * Unless required by applicable law or agreed to in writing, software distributed under the License
 * is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied.
 */

metadata {
    definition (name: "DM2500ZB Sinopé Dimmer", namespace: "Sinopé Technologies", author: "Sinopé Technologies") {
        capability "Actuator"
        capability "Configuration"
        capability "Refresh"
        capability "Switch"
        capability "Switch Level"

        fingerprint profileId: "0104", inClusters: "0000 0003 0004 0005 0006 0008", manufacturer: "Sinopé Technologies"
    }


    tiles(scale: 2) {
        multiAttributeTile(name:"switch", type: "lighting", width: 6, height: 4, canChangeIcon: true) {
            tileAttribute ("device.switch", key: "PRIMARY_CONTROL") {
                // ...
            }
        }
    }
}


```

[Create](#) [Cancel](#)

SmartThings driver installation guide for Zigbee smart dimmer DM2500ZB (cont'd)

- 6 Click on "Save" and click on "Publish for Me"

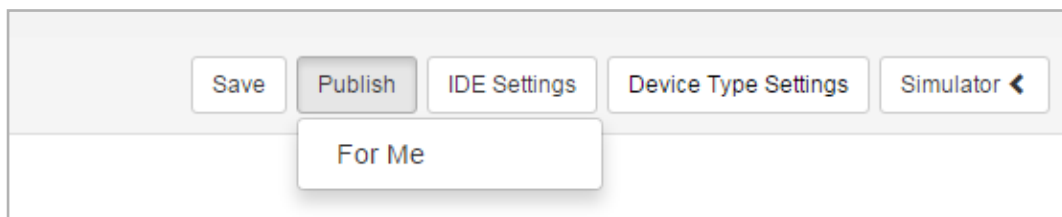

- 7 Connect to your SmartThings phone app
- 8 Press the "+" to enable device detection
- 9 Briefly press both buttons on the device to connect it to your SmartThings gateway
- 10 Repeat step "9" for each device to be connected
- 11 Press "Done" when you have finished adding all your devices