

sinopé

Control4

TH1123ZB-C4 / TH1124ZB-C4 SMART THERMOSTAT FOR ELECTRIC HEATING



CONTROL YOUR COMFORT
ANYTIME, ANYWHERE!

The smart thermostat for electric heating allows you to control the temperature of the different rooms of your home wherever you are. It can easily be integrated into your Control4 home automation system and works with a wide variety of devices. Managing your energy consumption and using only what you need while saving money, is right at your fingertips.

Ideal for: house, cottage, multi-housing property managers and commercial buildings



TH1123ZB-C4

TH1124ZB-C4



Baseboard heaters

Convectors

Fan-forced convectors

Radiant ceilings

TH1123ZB-C4 / TH1124ZB-C4

SMART THERMOSTAT FOR ELECTRIC HEATING




ADDED VALUE

- Voice control with Alexa (Amazon Echo)
- Outdoor temperature display
- Detection of the connected load
- Lockable buttons
- Temperature display in Celsius or Fahrenheit
- Backlit display
- 3-year warranty


OPERATION

- Easy installation [2 non-polarized wires]. The smart thermostat for electric heating can be controlled manually or remotely.

Remote access requires a permanent Internet connection and a Control4 controller.

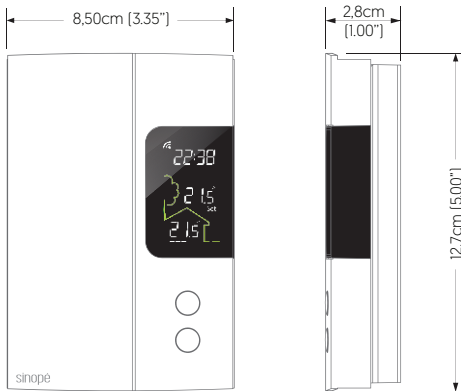

TH1123ZB-C4

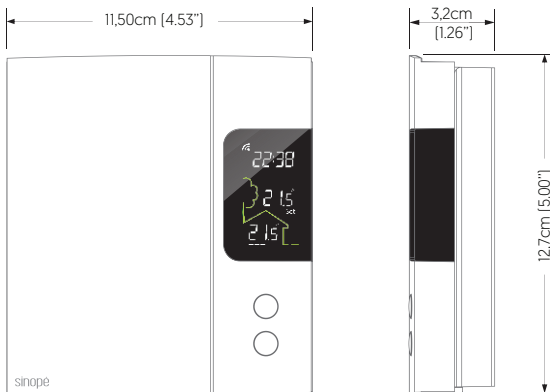

TH1124ZB-C4

SPECIFICATIONS

Operating voltage: 120 / 208 / 240 Vac, 60 Hz
 Setpoint range: 5 °C to 30 °C [41 °F to 86 °F]
 Display range: 0 °C to 50 °C [32 °F to 99 °F]
 Resolution: ±0.5 °C [±1 °F]
 Storage: -20 °C to 50 °C [-4 °F to 122 °F]
 Operation: 0 °C to 50 °C [32 °F to 122 °F]

Load	TH1123ZB	TH1124ZB
Min.	0.5 A / 120 W @ 240 Vac	0.5 A / 120 W @ 240 Vac
Max.	12.5 A / 3000 W @ 240 Vac	16.7 A / 4000 W @ 240 Vac

Zigbee 3.0 Profile
 Frequency: 2.4 GHz
 Transmission power: +20 dBm
 Receiver sensitivity: -108 dBm

Tested in accordance with CSA-C828-13

sinopé

T. : 450.741.7700 TF: 1.855.741.7701

sinopetech.com

ventes.sales@sinopetech.com

Saint-Jean-sur-Richelieu, Qc, Canada



270163-0003-C